



CGN3U setup- Advance wifi modem setup

1. **Reset** modem as shown below : take sharp object and push inside whole for 10 seconds.

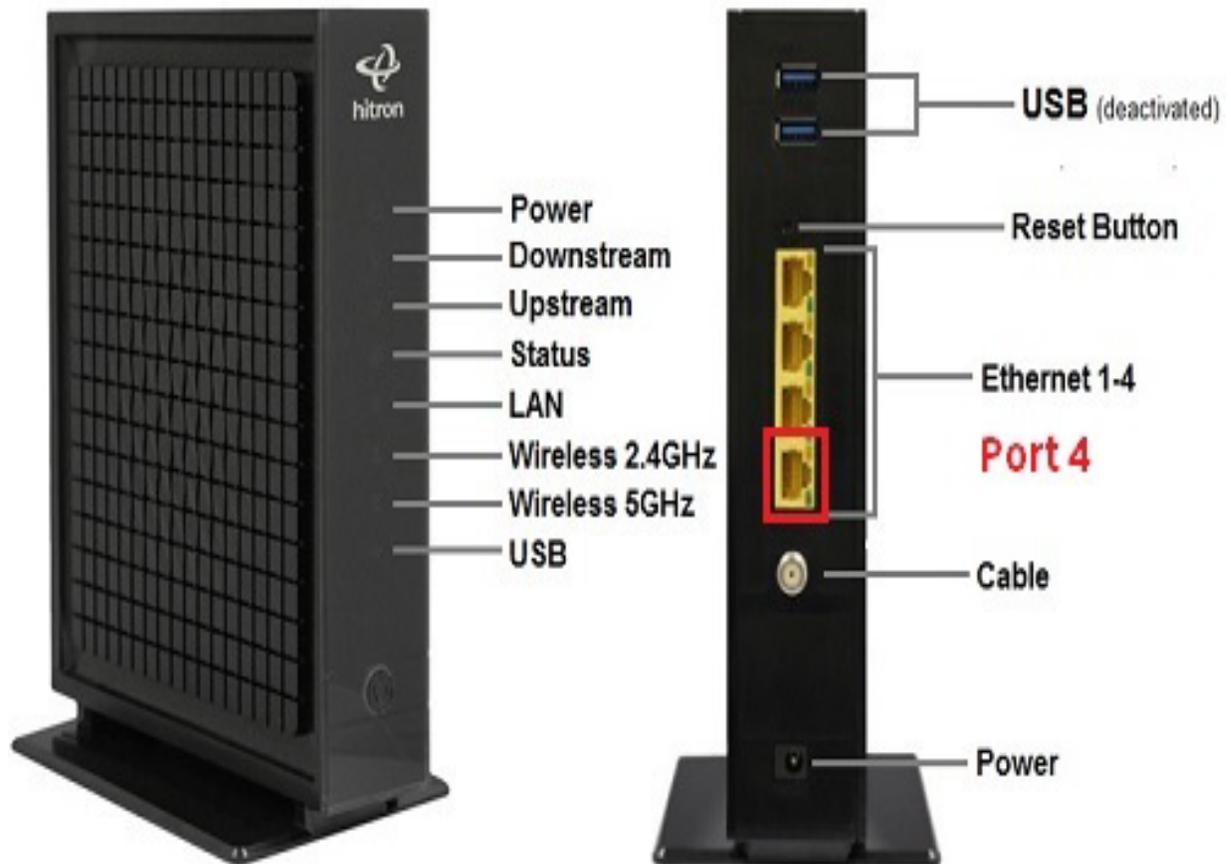

- Status of lights after 3 minutes of reset.

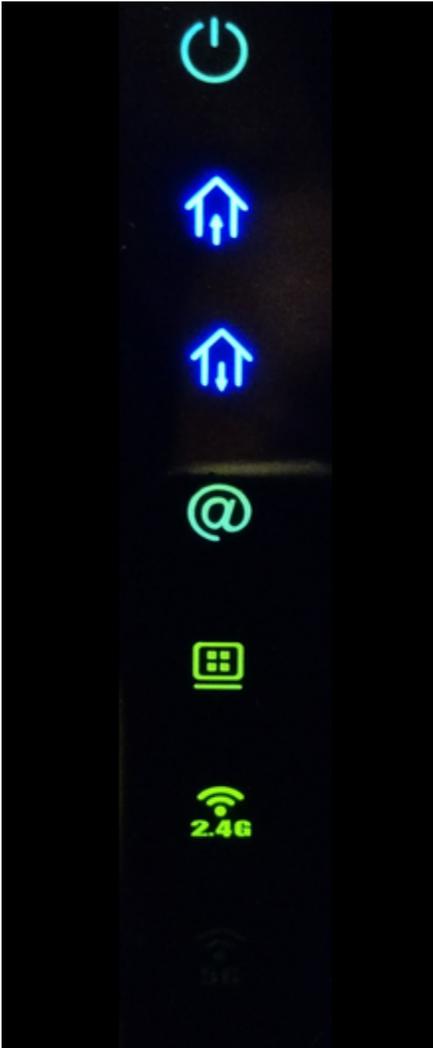

- Use any device which has the Wi-Fi function.


Select the Wi-Fi name which is labeled at the back of the modem choose wifi name **easyconnectXXXX**.

An “Easy Connect” screen should appear upon first connection.


- If the Easy Connect page does not appear automatically, Open a Web Browser and go to <http://192.168.0.1>

4. Once on the Easy Connect screen, start by clicking **“LET’S GO”**

We can have you connected to your Wi-Fi Modem and online in just a few minutes.

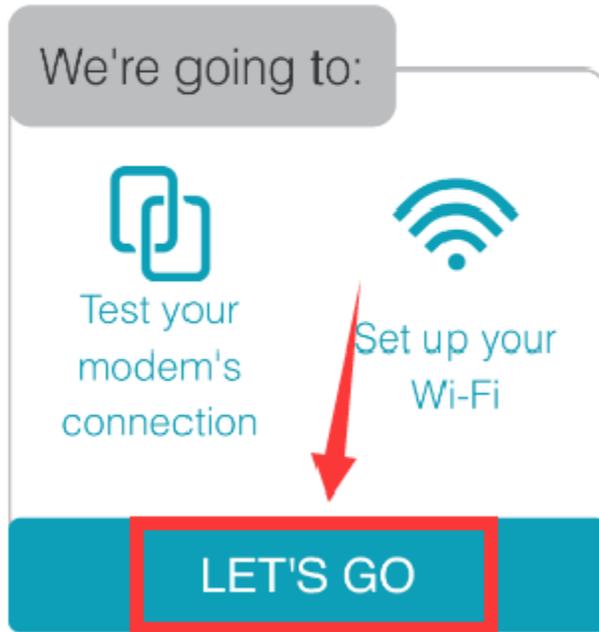


5. Click **“Test Connection”** – this is just verifying you’re connected to the internet. If this step fails, please contact us.

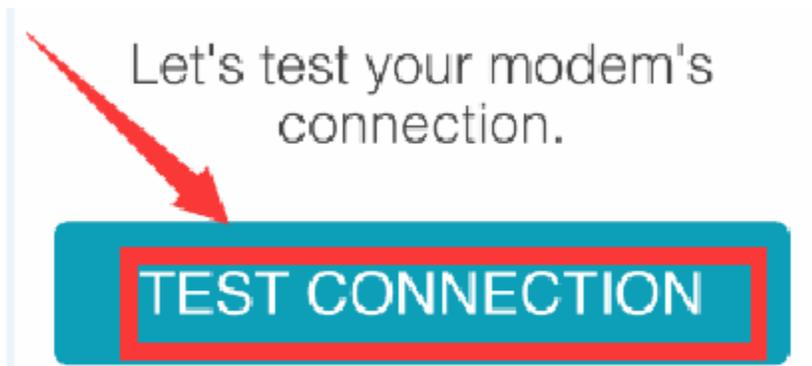


6. Click “Set Up Wi-Fi” – Following the prompts on the screen.



7. You will be directed to now change your **SSID** (i.e. your WiFi network name) to anything you like, and set up a personalized password you can remember(it must be atleast 8 characters).Click “**Confirm Setup**”.

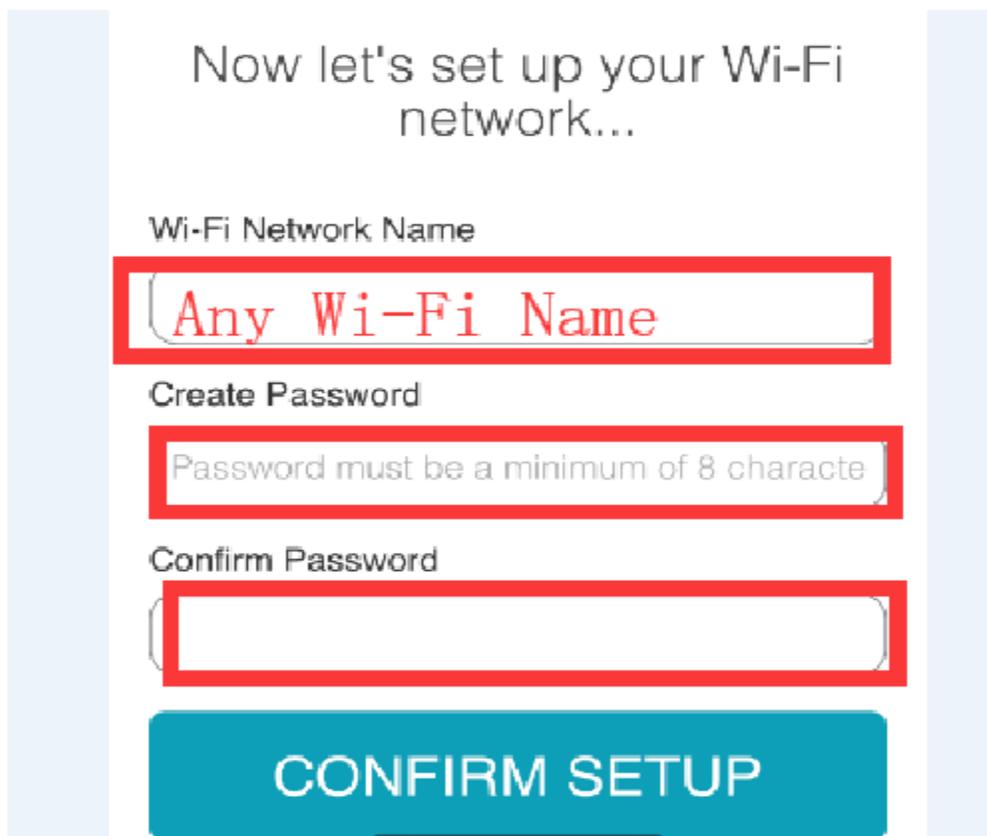A screenshot of a Wi-Fi setup screen. The text at the top says "Now let's set up your Wi-Fi network...". Below this are three input fields, each with a red border. The first field is labeled "Wi-Fi Network Name" and contains the text "Any Wi-Fi Name". The second field is labeled "Create Password" and contains the text "Password must be a minimum of 8 characte". The third field is labeled "Confirm Password" and is empty. At the bottom of the screen is a large teal button with the text "CONFIRM SETUP" in white.

8. Ensure you're satisfied with your new settings on this summary page. Write down your SSID and password somewhere safe! If you're happy – click **“Complete My Setup”**

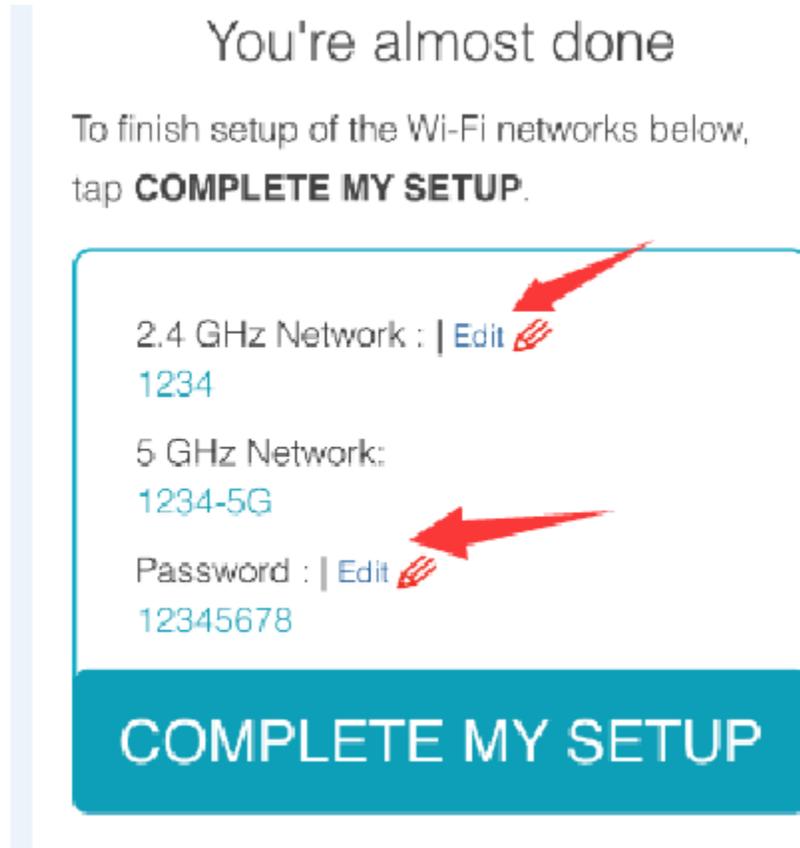

9. Click **“Close”** to finish the setup.

You can now connect to the new SSID using the password you selected during this setup.